

Selectable UFO High Bay Light



Wattages: 85W, 120W, 150W ; 115W, 160W, 200W; 140W, 190W, 240W



Selectable UFO High Bay Light series can be widely used in outdoor or indoor lighting(Wet location),Excellent for Museums,Underground parking lot,Workshop, warehouse, gymnasium and many more applications.




Structure Features:

- ◆ LED high luminous efficiency and long working life. ◆ High efficiency LED Driver, the wide range input voltage AC120-277V / 277-480V.
- ◆ Die-cast aluminum cooling design, high quality and better cooling for LED $T_j < 85^{\circ}\text{C}$
- ◆ Excellent optics design, greatly improve the light utilization and evenness.
- ◆ Wireless bluetooth system and Motion sensor control available (Optional)
- ◆ 12Vdc auxiliary dimming

- ◆ Shell materials: Aluminum & PC
- ◆ Finish:BLACK(Standard)
- ◆ Net weight: 85-150W:1.84Kg (4.06 lbs)
115-200W:2.23Kg (4.90 lbs)
140-240W:2.80Kg (6.17 lbs)
- ◆ Product Size: 85-150W:φ260X154mm(10.2"X6.1")
115-200W:φ300X154mm(11.8"X6.1")
140-240W:φ340X164mm(13.4"X6.5")
- ◆ Carton Size: 85-150W:277X274X139mm
(10.91"X10.79"X5.47")
115-200W:317X314X139mm
(12.48"X12.36"X5.47")
140-240W:358X354X143mm
(14.09"X13.94"X5.63")

DIMENSION:

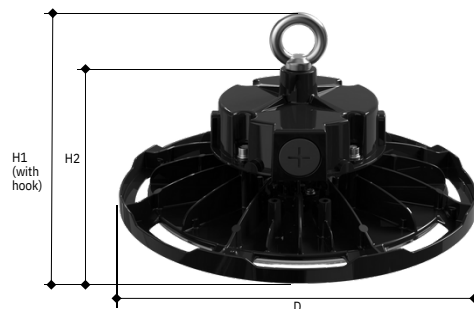

Size unit: inch(mm)

Size	150W	200W	240W
Diameter, D	10.2(260)	11.8(300)	13.4(340)
Height 1, H1*	6.1(154)	6.1(154)	6.5(164)
Height 2, H2*	4.3(110)	4.3(110)	4.7(120)

SPECIFICATION									
TYPE	WSD-UFO851215W27-3545K-B-H			WSD-UFO115160200W27-3445K-B-H			WSD-UFO141924W27-3445K-B-H		
WATTAGE	85W	120W	150W	115W	160W	200W	140W	190W	240W
LUMEN	12325lm	17400lm	21750lm	16675lm	23200lm	29000lm	20300lm	27550lm	34800lm
EFFICACY	>145 lm/W								
CCT	3500K,4000K, 5000K								
CRI	70								
INPUT VOLTAGE	AC120-277V/277-480V								
BEAM ANGLE	89°								
POWER FACTOR	0.95								
DRIVER EFFICACY	90%								
DIMMING	0-10V dimming 12V Auxiliary power								
FACTORY SETTINGS	150W & 4000K			200W & 4000K			240W & 4000K		
LIFE SPAN	over 50,000 hrs								
WORKING TEMPERATURE	-22°F ~ 113°F								
STORAGE TEMPERATURE	-40°F ~ 176°F								
OUTDOOR RATING	Wet location								
CABLE	3 core, 18AWG (72 inch)								
WARRANTY	5 year limited								

Selectable UFO High Bay Light

Wattages: 85W, 120W, 150W ; 115W, 160W, 200W; 140W, 190W, 240W


Bluetooth®
(Option)



MOTION SENSOR
and Bluetooth options

Hook (Standard)

Optical lens is made of high quality PC material to make the light even and soft.



Top tier LEDs are driven well below recommended safety limits, on both drive current and junction temperature, to keep components cool – maintaining the life of the LED, allowing for a compact and efficient heat sink design.



High performance, die cast heat sink transfers heat from the light engine to the environment, via large cooling fins, drawing heat away from the fixture, and extending the lifespan of the LEDs.

WATT/CCT
SELECTABLE

Selectable CCT

Three position sliding switch
3500K / 4000K / 5000K

Selectable Power

Three position sliding switch
85W / 120W / 150W
115W / 160W / 200W
140W / 190W / 240W

EMERGENCY BACK-UP (SOLD SEPARATELY)



WSD-EMUFO40W347-R
30W/40W/60W Emergency
Backup Battery

**Available only for low-voltage
(120-277Vac) Luminaire models**

CONTROL (SOLD SEPARATELY)



Bluetooth®

ANT-5-4T-BLE-SR
Bluetooth
Microwave Motion
Sensor



Bluetooth®

ANT-5-4T-BLE-GE
Bluetooth
Microwave
Fixture Sensor



ANT-5-4T

Motion Sensor
Bi-level microwave
Sensor




RC100
Remote Controller



BRI-WS204-GE

4-Button Wireless Wall Switch
**(Can only be used for
ANT-5-4T-BLE-GE)**

ACCESSORIES (SOLD SEPARATELY)



UFO High Bay
Lights Pendant Adaptor

Item: PDUFO-M10-3/4

Main Parameters: bottom screw M10, top thread NTP3/4"

Material: Aluminum



HOOK

Item:

WSD-UFO-HOOK

Main Parameters: WSD-UFO-PNC-200W
bottom screw M10 WSD-UFO-PNC-240W



WIRE GUARD

Item:

WSD-UFO-PNC-150W

WSD-UFO-PC-200W

WSD-UFO-PC-240W



Polycarbonate Cover

Item:

WSD-UFO-PC-

150W WSD-UFO-

PC-200W WSD-

UFO-PC-240W



Glare shield on
lens bottom

Item:

WSD-UFO-BPC-

150W WSD-UFO-

BPC-200W WSD-

UFO-BPC-240W



Trunnion

Item: WSD-UFO-T Trunnion, Mainly
used for indoor or outdoor ceiling
installation, can be directly mounted
on the ceiling.

ORDERING INFORMATION


EXAMPLE: **WSD-UFO851215W27-3545K-Z[D,W,B,S]-U[H,T]-E[Blank,M]** / **WSD-UFO141924W27-3545K-Z[D,W,B,S]-U[H,T]-E[Blank,M]**

WSD	UFO	851215W	27	3545K	Z	U	E
COMPANY	PRODUCT	WATTAGE	VOLTAGE	CCT	FINISH	MOUNTING	CONTROL
WSD LED INC	UFO (UFO High Bay Light)	851215W 85W/120W/150W 115W/160W/200W 141924W 140W/190W/240W	27 (AC120-277V) 48 (AC277-480V)	35K - (3500K) 4K - (4000K) 5K - (5000K)	D - (Dark Bronze) W - (White) B - (Black) S - (Silver)	H - (Hook) T - (Trunnion)	M - (Motion Sensor)


Selectable UFO High Bay Light



Wattages: 85W, 120W, 150W ; 115W, 160W, 200W; 140W, 190W, 240W

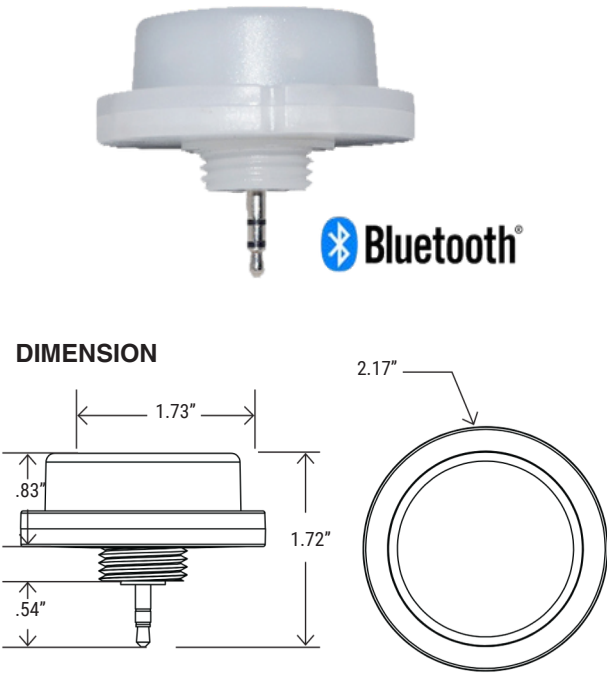

COVERAGE

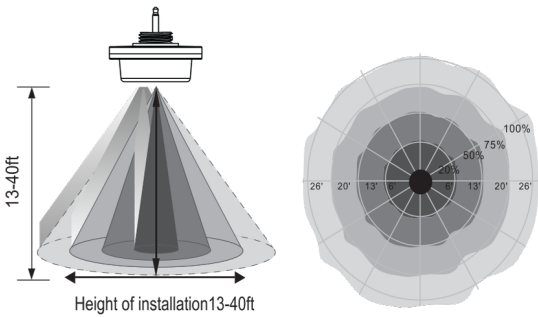

MICROWAVE SENSOR FEATURES	
DAYLIGHT HARVESTING	On/Off
MOTION SENSING	On/Off
FIRST TIME DELAY	1-59 mins/infinite
SECOND TIME DELAY	0-59 mins/infinite
DIM LEVEL	0-100%
MOUNTING HEIGHT	13-40ft
DETECTION RANGE	up to 52ft diameter
DETECTION: HORIZONTAL	360°
DETECTION: VERTICAL	90°

COMMISSIONING

SilvairiOS App makes it easy to pair devices, create groups, set scenes/schedules, customize dimming levels, and adjust high trim based on application needs.

ANT-5-4T-BLE-SR Plug and Play Network BLE Nodes and Sensor

The Bluetooth Lighting Control provides automated individual and group control of light fixtures using on sensors and Bluetooth mesh technology. The ANT-5-4T-BLE-SR mounted in an Commercial lighting fixture and provides multi-level control solution based on motion and or daylight harvesting contribution.

FEATURES

- Lighting controls meet design lights consortium (DLC) networked lighting control system technical requirements.
- Quick connect and adjust different sensor angle.
- Easy commissioning with Mobile App (Available in IOS).
- Bluetooth network with Saas working by computer
- Individual addressability and/or grouping.
- Time clock scheduling for individual lights, groups or scenes.
- Multi-level dimming: manual ON/OFF automatic ON/OFF, and automatic p ON/OFF, daylight harvesting control capability.

SPECIFICATION	
NETWORK BLE MESH	Yes
DAYLIGHT HARVESTING	Yes
MICROWAVE MOTION SENSOR	Yes
DETECTION MODE	Occupancy/Vacancy/Bi-level in 1 Unit
OPERATING VOLTAGE	12-24V DC
OPERATING CURRENT	>50mA
SINKING CURRENT	max. 25mA
CONTROL OUTPUT	0-10V
RADIO FREQUENCY	2.4GHz ± 75MHz
WIRELESS STANDARD	BLE 5.0 MESH
PROGRAMMING	Silvair iOS App (IOS)
CYBERSECURITY	UL
ENCRYPTION	AES 128-bit
MESH RANGE	60ft node-to-node and 500ft node-to-device (Commissioning)
SAFETY	cULus Listed
FCC	FCC
OPERATING TEMP.	-20°C - +60°C
IP RATING	IP65
WARRANTY	5 year limited

Silvair App



iOS


Please scan and download the app.

Operation Instruction:
<https://youtu.be/8KWPK721g>

Selectable UFO High Bay Light



Wattages: 85W, 120W, 150W ; 115W, 160W, 200W; 140W, 190W, 240W

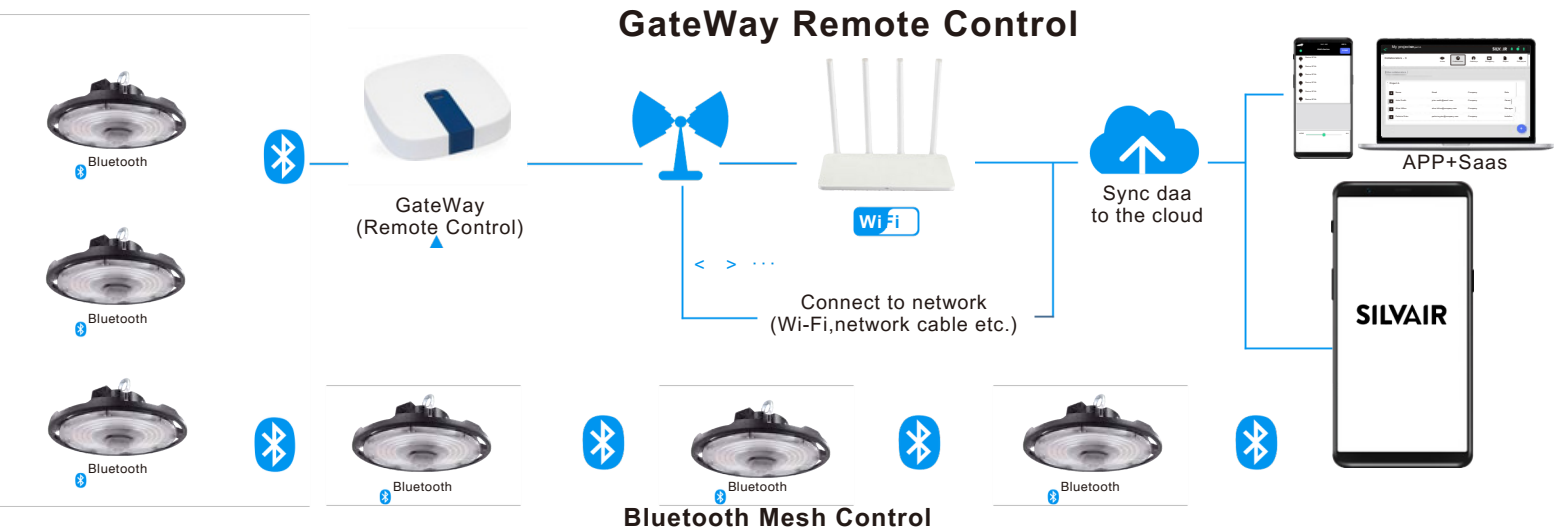

INDUSTRIAL GATEWAY

SGW-101 Smart Engineering Gateway

The Silvair Gateway connects Bluetooth mesh networks that have been commissioned using the Silvair Commissioning tools to the Silvair cloud. This allows the scheduling of events and delivery of services based on the data generated by these networks.

Functions:

TheSilvairGateway enables the following functions in the Silvair web app:

- Scheduling (available by default)
 - Scheduling changes in scenes and lighting control scenarios (for example occupancy sensing,daylight harvesting) for specific times or days.
- Energyand occupancy monitoring (additional paid service)
 - Visualizing energy use and occupancy via the Silvair web app.
 - Downloading energy and occupancy via the Silvair web app and cloud-based API.
- Remote monitoring and control (additional paid service)
 - Low-latency monitoring of the status of devices in the network via API.
 - Low-latency control of devices in the network via API.
- System diagnostics
 - Monitoring of the status of Bluetooth mesh networks.
 - Remote troubleshooting of networking issues.

Features:

- Future-proof Linux operating system.
- Simple commissioning using the Silvair Commissioning tools.
- Automatic connection to the Silvair cloud.
- Secure provisioning with secure IDs and encrypted keys.
- High level of hardware and software security (secure boot and encrypted file system can only be accessed with the management platform).
- Automatic security updates.
- Prompt releases of OS updates and fixes to vulnerabilities.
- Low-latency transfer of network, luminaire, and sensor status data to the Silvair cloud.
- Schedule caching.
- Automatic remote firmware updates.
- Display of gateway and network performance metrics (requires the Silvair web app).

SPECIFICATION	
POWER SUPPLY	4.5–5.5 VDC, 2 A Power over Ethernet 36–57 V DC (IEEE 802.3af)
OPERATING SYSTEM	Ubuntu Core
PROCESSOR	i.MX6ULL (Y2), 32-bit ARM 800 MHz
MEMORY	512 MB DDR3L SDRAM 8GB eMMC
COMMUNICATION PROTOCOLS	Bluetooth mesh (2.4 GHz Bluetooth Low Energy) Wi-Fi 802.11a/b/g/n/ac (2.4/5 GHz) 4G LTE Cat 1 with 2G/3G (only for Cascade-500-W and Cascade-500-X gateways)
PORTS	1 x RJ45 10/100 Ethernet 1 x USB 2.0 Type-A 2 x external dipole antenna, 5 dBi (only for Cascade-500-W and Cascade-500-X gateways)
REQUIRED AMBIENT TEMPERATURE	0°C to 60°C 32°F to 140°F
ENCLOSURE DIMENSIONS	127 mm x 127 mm x 30 mm (5 inch x 5 inch x 1.2 inch)
MOUNTING POSITION	Wall or surface mounted. As close to the geometrical center of the lighting network as possible, but as far as possible from potential sources of interference.
SECURITY	Secure boot with encrypted operating system Secure communication with the Silvair Cloud over Internet (TLS) Secure communication with devices over qualified Bluetooth mesh

Selectable UFO High Bay Light




Wattages: 85W, 120W, 150W ; 115W, 160W, 200W; 140W, 190W, 240W


PHOTOMETRICS

For complete IES files, please visit our website.

WS-DUFO851215W27-3545K (150W 4 000K)

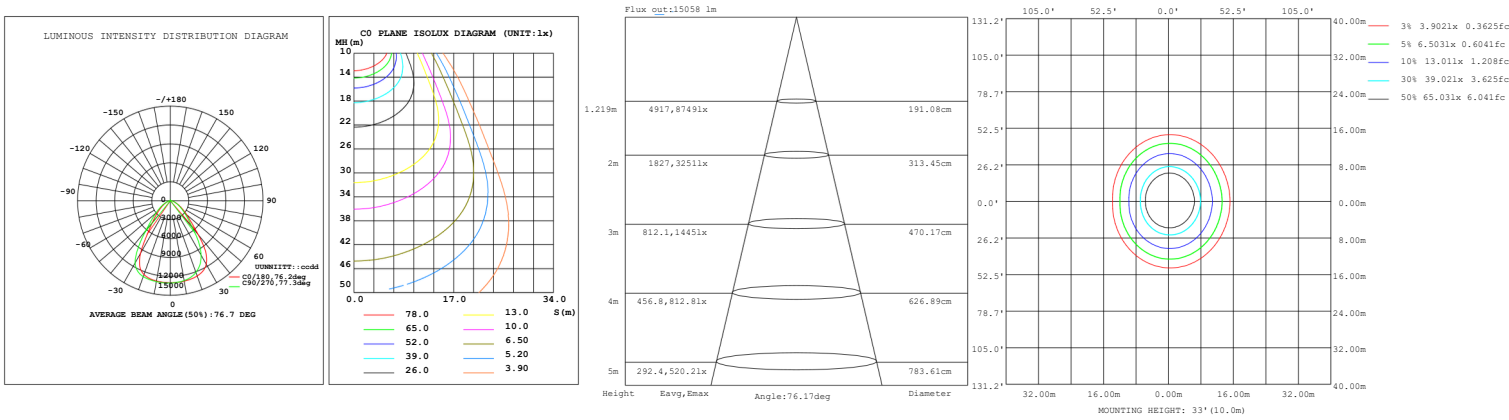

WSD-UFO115160200W27-3545K (200W 4000K)

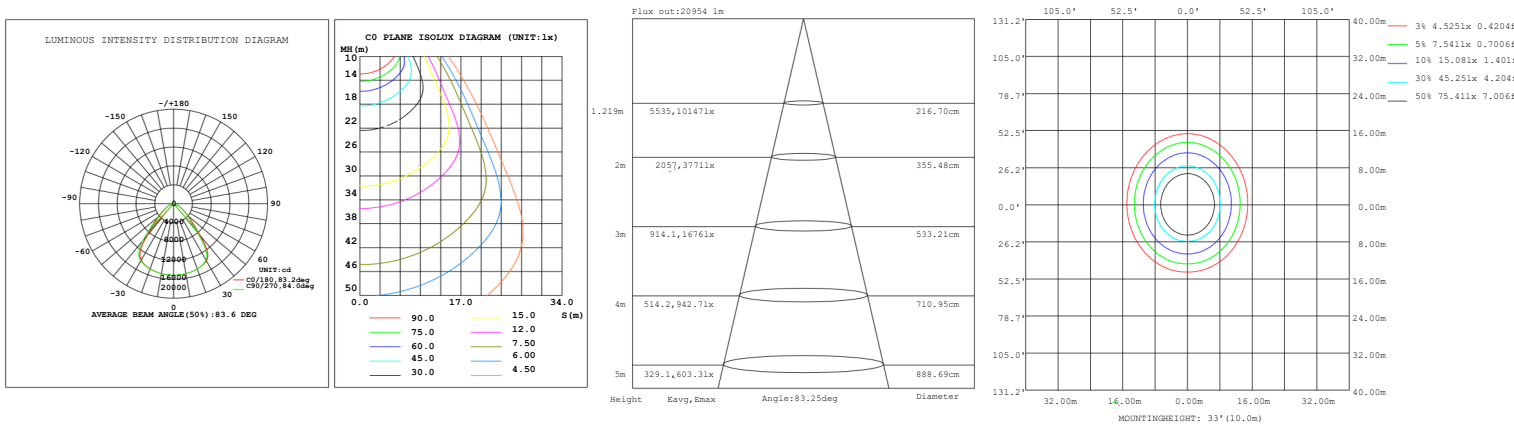

WSD-UFO141924W27-3545K (240W 4000K)

